


Piston rod side

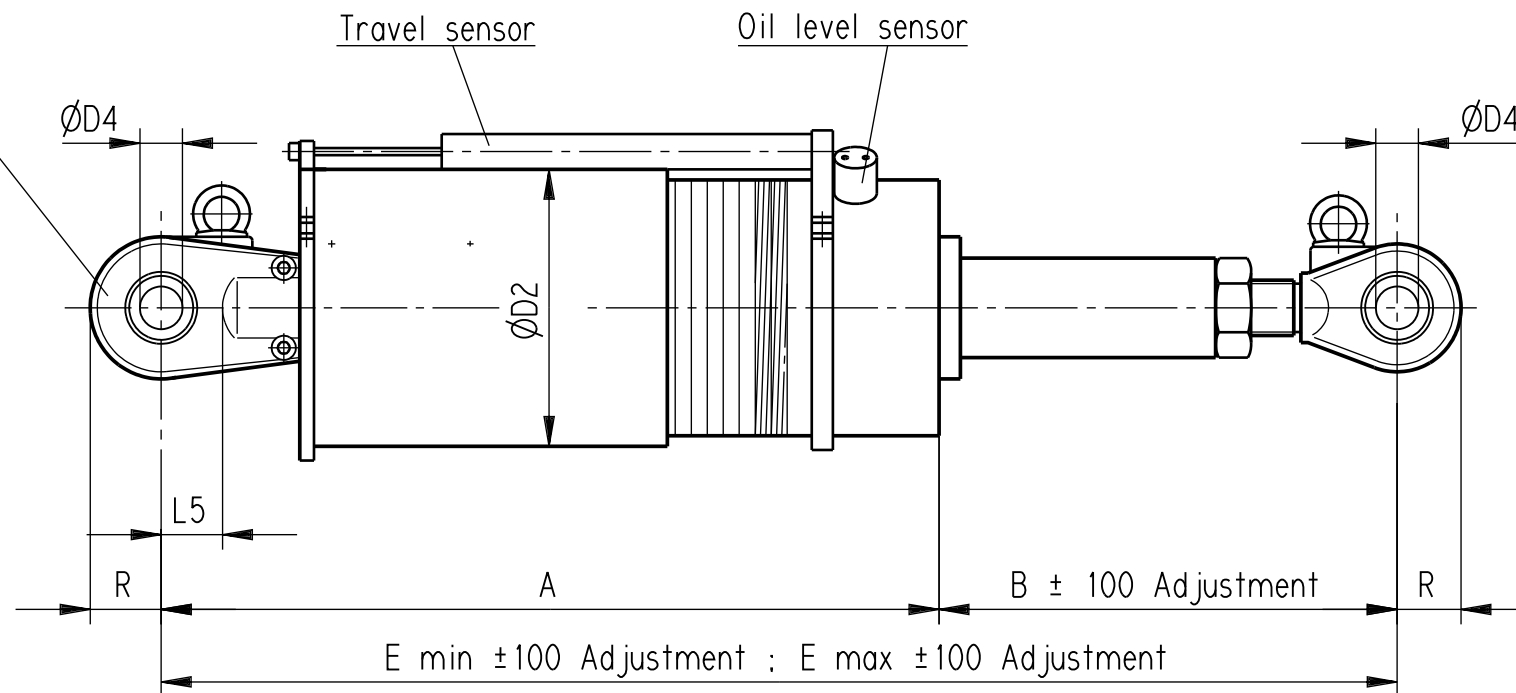

Type	30 08 52-R170B	30 08 52-R170C	30 08 52-R170D
max. faulted load [kN]	1668	1668	1668
Stroke	100	100	100
A min	640	640	640
A max	740	740	740
B	570	710	1120
$\varnothing D2$	390	390	390
$\varnothing D4$	90	90	90
E min	1210	1350	1760
E max	1310	1450	1860
L4	135	135	135
L5	130	130	130
R	130	130	130
S	75	75	75
SG	85	85	85
Weight	414 kg	431 kg	463 kg

EA-Nr.: 10191

		General Tolerances DIN ISO 2768-m		Special Snubber Type 30				
3	Weight added	19.05.20	ANP	Scale	2015	Datum	Name	562471-3
2	EA-Nr. geändert	20.02.15	JDU	Bearb.	11.02.	Duden		Zeichnungs Nr./Drawing no.
1	Typ 30..-R20BCD->-R170BCD geändert	17.02.15	JDU	Gepr.	16.02.	ARA		Bl./page Rev.
Nr	Revision	Bearb.	AV/QM	AV/QM/BMT				Fertigungsauftrags Nr./Serial no.